

BRIG HRV 200, 300

HEAT RECOVERY VENTILATOR



CASING

- Steel casing is covered with high-quality multilayer aluminium and zinc alloy to prevent corrosion. The casing is equipped with a switch to turn the ventilator off when the service panel is opened.

FILTER

- Washable MERV 6 air filters in exhaust and supply air streams.
- Optional supply: anti grease filter.

HEAT RECOVERY CORE

- Specially designed polymer plate core ensures excellent heat recovery efficiency. Whenever heat recovery is not required, the heat recovery block can be easily replaced by a "summer" block. The ventilator is also equipped with a drain pan for condensate drainage.

DEFROST SYSTEM

- To protect the heat recovery core, the freezing electronic protection system is applied. It switches the supply fan off as the temperature sensor requires. Warm extract air defrosts the heat recovery core, then the supply fan switches on and the ventilator continues operating under rated conditions.

MOTORS

- German made high-efficient motor combined with backward inclined impeller delivers exceptionally powerful airflow and high static pressure. Built-in thermal overheating protection with automatic restart makes the motor operation secure and reliable. Permanently lubricated ball bearings inside the motor provide long (40000 hours) trouble- and maintenance-free operation.

DESCRIPTION

A Heat Recovery Ventilator is a complete whole house ventilation system designed to bring a continuous supply of fresh air into the house while exhausting an equal amount of stale air.

FEATURES

- Efficient recovery ventilation
- Cross flow core
- Silent operation
- Replaceable filters
- Simple installation and maintenance
- Compatible with 6" and 8" air ducts
- Electronic defrost protection

FANS

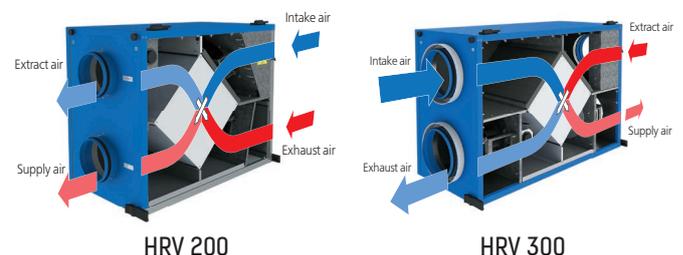
- The ventilator is equipped with supply and exhaust centrifugal fans with backward inclined blades and built-in thermal overheating protection with automatic restart. The electric motors and the impellers are dynamically balanced in two planes.

CONTROL

- The ventilator is equipped with 3-step switch on its side panel to choose STANDBY, LOW or MEDIUM mode for continuous operation.
- The unit can be equipped with wide range of additional controls to switch boost on demand.

MOUNTING

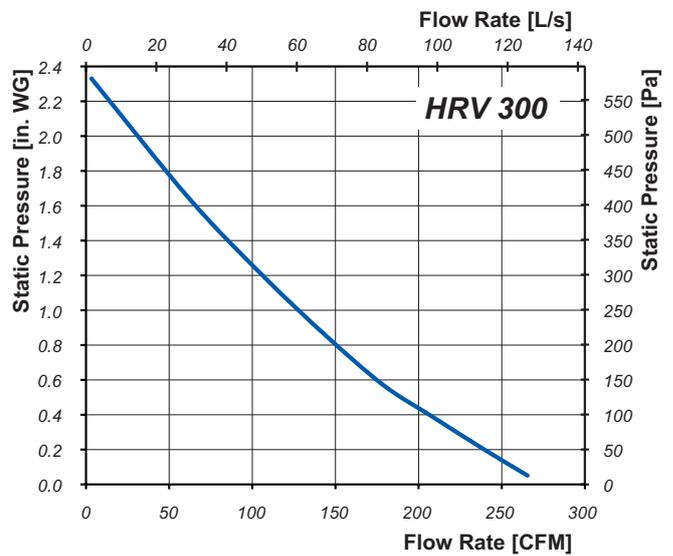
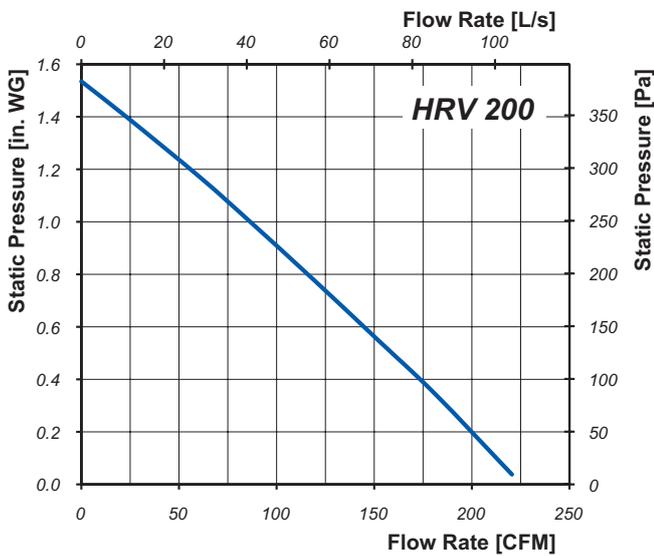
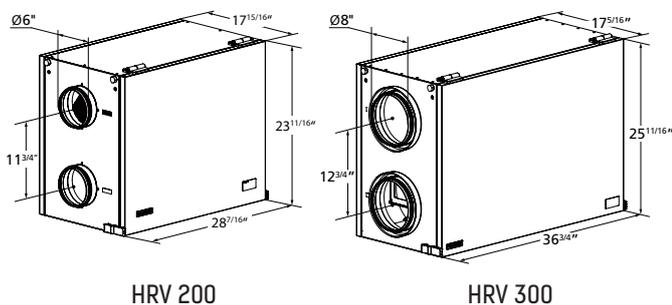
- The unit can be mounted in most positions and in most spaces. Please refer to installation manual for instructions and details.



PERFORMANCE

Model	Volts	Max. Amps	Net Supply Air Flow CFM (L/s)												Duct Dia.
			Ext. Static Pressure in. wg (Pa)												
			0.1" (25Pa)	0.2" (50Pa)	0.3" (75Pa)	0.4" (100Pa)	0.5" (125Pa)	0.6" (150Pa)	0.7" (175Pa)	0.8" (200Pa)	0.9" (225Pa)	1.0" (250Pa)	1.2" (300Pa)	1.4" (350Pa)	
HRV 200	120V, 60Hz	1.8	213 (101)	200 (94)	187 (88)	173 (82)	159 (75)	145 (68)	130 (61)	117 (55)	101 (48)	87 (41)	71 (34)	56 (26)	6"
HRV 300	120V, 60Hz	3.8	257 (121)	239 (113)	223 (105)	207 (98)	190 (90)	175 (83)	162 (76)	151 (71)	139 (66)	129 (61)	118 (56)	107 (50)	8"

Model	Mode	Temperature		Net Air Flow		Power Consumed	Sensible Recovery Efficiency
		°C	°F	(L/s)	(cfm)	(Watts)	SRE (%)
		HRV 200	HEATING	0	32	30	64
		0	32	45	95	210	83
		0	32	60	127	212	81
HRV 300	HEATING	0	32	30	64	444	80
		0	32	45	95	446	78
		0	32	60	127	447	77


DIMENSIONS

ACCESSORIES

 Tel: 888-640-0925
 Fax: 513-268-4597

 Sales@ventsus.com
 VentsUS.com
 400 Murray Rd,
 Cincinnati, OH 45217
