



## DESCRIPTION

The CBF fans are centrifugal exhaust fans for ceiling mounting in bathrooms and other utility spaces.

The CBF fans are designed for long duct runs. The fans are compatible with 4" and 6" air ducts.

## PERFORMANCE

<b>Duct Dia</b>	4"/6"		
<b>Speed</b>	HS	LS	
<b>Watts*</b>	35**	23**	
<b>Amps*</b>	0.3	0.2	
<b>RPM*</b>	1121	920	
<b>Sones*</b>	2.5**	1.1**	
<b>CFM vs. Static Pressure in.W.G.</b>	0"	130	79
	0.1"	120**	70**
	0.2"	107	56
	0.25"	100**	46**
	0.3"	91	37
	0.4"	66	20
	0.5"	35	-
<b>Max. static pressure in.W.G.</b>	0.6	0.49	
<b>Volts/Hz</b>	120/60		
<b>Energy Star qualified</b>	V		

\* Indicated at 0.1 in.W.G.


\*\* HVI certified ratings

## BENEFITS

- Low noise level
- Reliable asynchronous double-speed motor
- Adjustable mounting brackets
- Adjustable turn-off and turn-on delay timer (option)
- Ready for plug-in humidity or motion sensor (sells separately) or
- Pre-installed humidity or motion sensor (option)
- Energy-efficient LED light (CBF Light modification only)

## SPECIFICATION

- Voltage: 120 V, 60 Hz
- Motor: AC motor
- Power consumption: 23-35 W
- Sones: 1.1 - 2.5
- Airflow capacity: up to 130 CFM
- Duct compatibility: Ø 4" and 6"

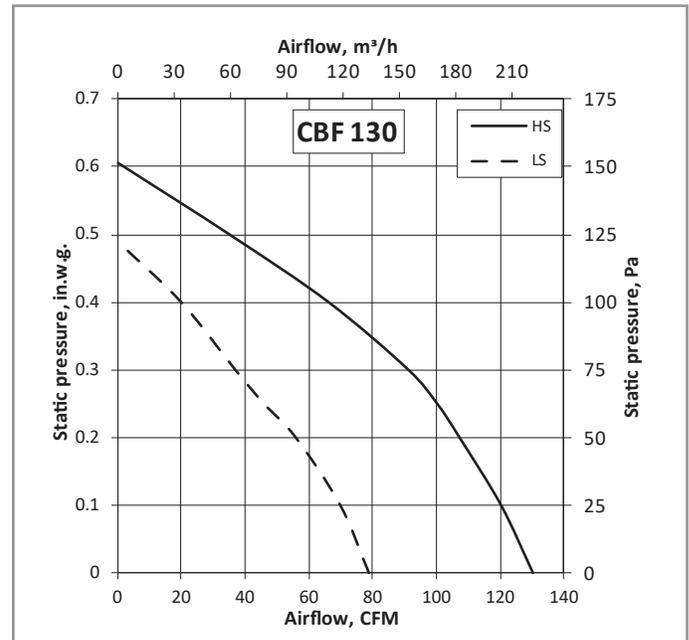


The curves are not HVI-Certified


## DIMENSIONS

MODEL	Dimensions [in]											
	D	d	L1	L2	A	B	C	E	H	h	a	b
CBF 130	5 7/8"	3 7/8"	4"	1 3/4"	13"	10 1/8"	10 1/4"	15 1/2"	7 3/8"	3/4"	-	-
CBF 130 LIGHT	5 7/8"	3 7/8"	4"	1 3/4"	13"	10 1/8"	10 1/4"	15 1/2"	7 3/8"	2 1/2"	8 1/4"	4 7/8"

CBF 130

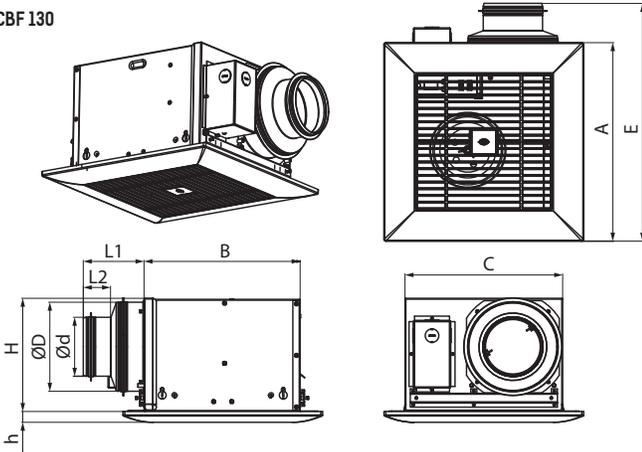

CBF 130 LIGHT

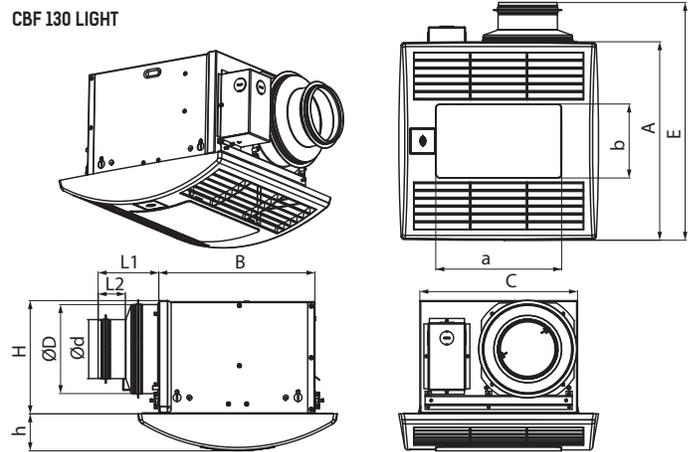

## DESIGNATION KEY

CBF 130 LIGHT TP

**Fan series**

CBF: Ceiling Bathroom Fan

**Rated air capacity (CFM)**

130: Rated air capacity (CFM)

**Basic options**

\_ : no additional options

Light: integrated LED light

**Additional options**

T: timer

TH: humidity sensor and timer

TP: motion sensor and timer

\_ : no additional options

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by: