


DESCRIPTION

The VENTS VK...P Series duct mounted centrifugal inline fans are suitable for a wide range of residential and commercial exhaust or supply air applications, such as bathrooms, kitchens, restaurants or equipment cooling.

The fans are fitted with backward curved centrifugal impeller driven by powerful sealed external rotor motor with lifelong bearings and thermal protection. This powerful combination enables the VENTS VK...P fans to deliver exceptional airflow performances and high static pressure. The fans' casing is made of high quality UV resistant plastic (UL94 certified plastic). The VENTS VK...P fans have been specifically designed for simple installation and many years of maintenance-free operation.

The VENTS VK...P series fans have built-in speed controller for smooth impeller rotation speed.

CASING

The fans' casing is made of high quality UV-resistant plastic (UL94 certified plastic).

MOTOR


The fans are fitted with backward curved centrifugal impeller driven by powerful sealed external rotor motor with lifelong bearings and thermal protection.

SUITABLE FOR:

Fans are suitable for a wide range of residential and commercial exhaust or supply air applications as well as for horticulture and hydroponics.

DIMENSIONS

Model	Measurements [in.]							lbs
	ØD	ØD1	B	L	L1	L2	L3	
VK 100 P	3 15/16"	9 13/16"	10 5/8"	9 1/16"	1 3/16"	1 1/16"	1 3/16"	4.7
VK 125 P	4 15/16"	9 13/16"	10 5/8"	8 11/16"	1 3/16"	1 1/16"	1 3/16"	4.9
VK 150 P	5 7/8"	11 13/16"	12 3/16"	11 1/4"	1 3/16"	1 3/16"	1 3/16"	5.7
VK 200 P	7 7/8"	13 3/8"	13 15/16"	10 7/8"	1 3/16"	1 3/16"	1 9/16"	8.8
VK 250 P	9 13/16"	13 3/8"	13 15/16"	10 7/16"	1 3/16"	1 3/16"	1 9/16"	9.9
VK 315 P	12 3/8"	15 3/4"	16 5/16"	16 5/16"	1 9/16"	2 3/16"	1 9/16"	11.2

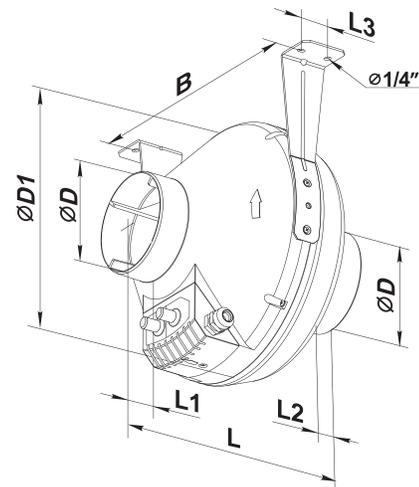

PERFORMANCE

Model	Duct dia	Sones	RPM *	Watts *	CFM vs. Static Pressure (Ps) in WG										Volt / Hz
					0"	0.125"	0.2"	0.25"	0.375"	0.5"	0.75"	1.0"	1.25"	1.5"	
VK 100 P	4"	2.3	2980	109	162	155	150	147	141	134	120	104	87	67	120 / 60
VK 125 P	5"	7.1	2960	114	235	222	214	207	193	178	151	123	99	72	120 / 60
VK 150 P	6"	2.7	2785	93	317	300	289	282	265	247	212	178	132	68	120 / 60
VK 200 P	8"	3.5	2781	149	507	481	465	455	423	395	343	287	238	189	120 / 60
VK 250 P	10"	4.3	2523	266	735	699	675	658	625	558	507	432	369	307	120 / 60
VK 315 P	12 ^{3/8} "	4.1	2641	269	871	817	779	758	703	635	501	393	324	266	120 / 60

* The parameters RPM, Watts are indicated at 0.2 in WG static pressure.

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by: