AIRLITE HRV 25

Energy and heat recovery ventilators for commercial applications

- Heat exchanger type: Cross flow
- Heat exchanger material: Polystyrene
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional

	Unit of measurement	AIRLITE HRV 25
Connected air duct size	in	8×30”
Phases	-	1
Minimum supply voltage	V	120
Maximum supply voltage	V	120
Power supply frequency	Hz	60
Rated power	W	2010
Maximum unit current	A	16.2
Maximum airflow	CFM	1785
Heat recovery efficiency, max	%	55
Heat exchanger type	-	Cross flow
Heat exchanger material	-	Polystyrene
Transported air temperature (max)	°F	90
Transported air temperature (min)	°F	5

Dimensions

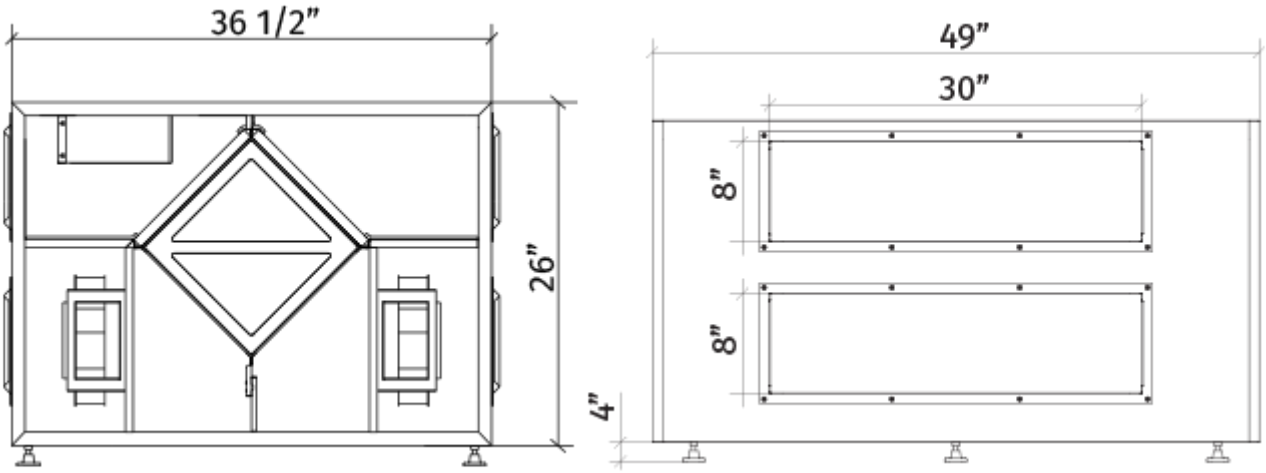
36 1/2”
26”
49”
30”
8”
8”
4”