


AirVENTS RP 2500

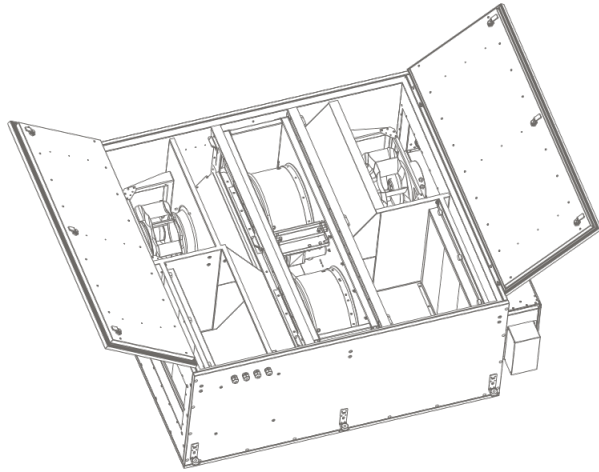

Ceiling-mounted commercial heat recovery air handling units. Available in 3 standard sizes

- Sound pressure level LpA at 3 m: 39
- Heat exchanger type: Rotary
- Extract filter: MERV13 (MERV8)
- Supply filter: MERV13 (MERV8)
- Sound insulation
- Motor type: EC
- Casing material: Aluzinc steel

	Unit of measurement	AirVENTS RP 2500
Phases	-	1
Minimum supply voltage	V	200
Maximum supply voltage	V	277
Power supply frequency	Hz	50/60
Unit current	A	3.75
Maximum performance @0.1"	CFM	1471
Sound pressure level LpA at 3 m	dB(A)	39
Heat exchanger type	-	Rotary
Heat exchanger material	-	Aluminum
Extract filter	-	MERV13 (MERV8)
Supply filter	-	MERV13 (MERV8)
Transported air temperature (max)	°C	122
Transported air temperature (min)	°C	-31
Ingress protection rating	-	IP34
Ingress protection rating of the drive	-	IP54

Dimensions

L	W	W1	H	H1
55"	51"	20"	24"	11"