TwinFresh Elite 160 Pro

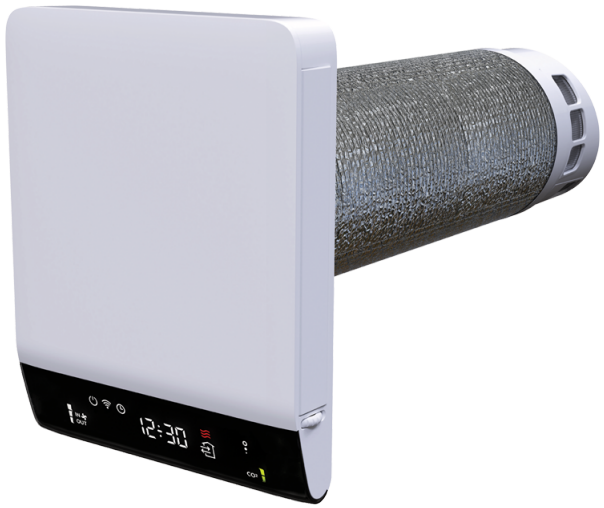

HRV unit for single-room ventilation

- Power of electrical preheater: 100
- Heat exchanger material: Copper
- Control: Smartphone
- Casing material: Plastic
- Humidity sensor
- Temperature sensor
- Sound pressure level LpA at 10 ft: 2.9
- Heater

	Unit of measurement	TwinFresh Elite 160 Pro		
Minimum supply voltage	V	120		
Maximum supply voltage	V	120		
Power supply frequency	Hz	60		
Rated power	W	5	11	22
Power of electrical preheater	W	100		
Maximum unit current	A	0.9	0.95	1.05
Maximum airflow	CFM	33		
Heat recovery efficiency, max	%	88		
Heat exchanger material	-	Copper		
Ingress protection rating	-	IPX4		
Sound pressure level LpA at 3 ft	Sones	0.4	3.2	5.6
Sound pressure level LpA at 10 ft	Sones	0.3	1.5	2.9

Dimensions

ØD	L	L1
6 3/8'' (162 mm)	21 1/4'' (540 mm)	17 3/8'' (439 mm)

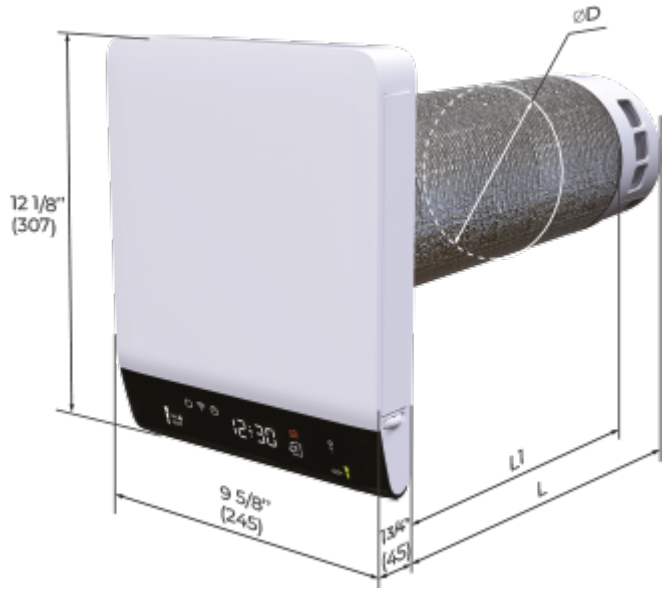

Accessories

Other accessories

Name	Photo	Description
CPSO-40 TwinFresh Elite 160		External compensator pad
CPSO-80 TwinFresh Elite 160		External compensator pad
CPSO-120 TwinFresh Elite 160		External compensator pad
CPSO-160 TwinFresh Elite 160		External compensator pad
CPSO-200 TwinFresh Elite 160		External compensator pad
MPS TwinFresh Elite 160		Stainless steel cuff for external installation
SF TwinFresh Elite G3 (MERV5)		Filter (2 pcs.)
SF TwinFresh Elite G4 (MERV8)		Filter (2 pcs.)

SF TwinFresh Elite G4 carbon (MERV8)		Filter (2 pcs.)