

## OV1/OVK1 SERIES

AXIAL FANS



### DESCRIPTION

Specifically designed for direct air exhaust through the wall, the VENTS OV1/OVK1 series fans are perfect ventilation solutions for parking garages, agricultural facilities and stores. These fans can effectively and quietly handle the major ventilation challenges without taking up valuable space.

### CASING

The fans' body is made of steel with polymeric coating while the impeller is made of aluminum.

### INSTALLATION BENEFITS

Fans arrive fully assembled and ready for immediate installation. The removable housing allows easy access to the motor and wiring connection.

### MOTOR

Asynchronous motor on ball bearings and thermal protection ensure the safe and smooth operation.

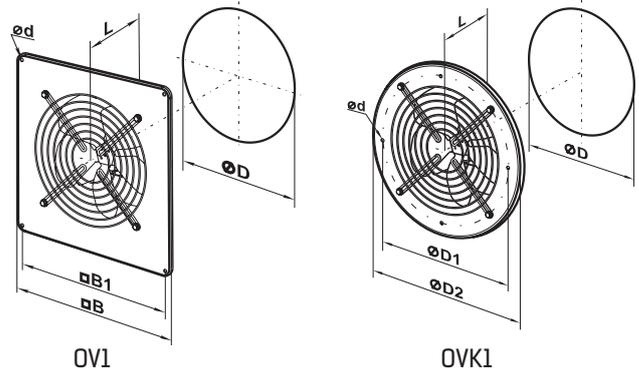


Installation example

**DIMENSIONS**

Model	Measurements [ins]				
	Ø D	Ø d	B	B1	L
<b>OV1 200</b>	8 3/16"	1/4"	12 5/16"	10 1/4"	4 3/4"
<b>OV1 250</b>	10 5/16"	1/4"	14 9/16"	12 5/8"	5 1/2"
<b>OV1 315</b>	12 5/16"	3/8"	16 15/16"	14 15/16"	6 11/16"

Model	Measurements [ins]				
	Ø D	Ø D1	Ø D2	Ø d	L
<b>OVK1 200</b>	8 3/16"	10 5/8"	11 13/16"	1/4"	4 3/4"
<b>OVK1 250</b>	10 5/16"	13"	14 3/16"	1/4"	5 1/2"
<b>OVK1 315</b>	12 5/16"	15 3/8"	16 9/16"	3/8"	6 11/16"


**PERFORMANCE**

Model	RPM*	Sones	Duct dia	Max Watts*	Max Amps*	CFM vs. Static Pressure (Ps) in WG				Max. Ps	Volts
						0"	0.125"	0.25"	0.375"		
<b>OV1 200 / OVK1 200</b>	1680	2.5	8 3/16"	43	0.63	262	211	56	-	0.30	115
<b>OV1 250 / OVK1 250</b>	1640	4.1	10 5/16"	84	1.17	475	428	288	113	0.45	115
<b>OV1 315 / OVK1 315</b>	1430	5.1	12 5/16"	109	1.37	766	626	-	-	0.15	115