PRODUCT SPECIFICATIONS

VKP 125/125*2

CENTRIFUGAL FAN

DESCRIPTION

VKP fans are specially designed for extract and input ventilation and are perfect air movement solution for areas with tight spaces. It provides small to medium airflow. The fans offer a variety of choices of extract and input ventilation options and enables ducting from multiple sources. Suitable for working airstreams 13-140 °F. Power cord included.
IPX4 Protection / Thermal Overload Protection.

CASING

The fan's housing is made of galvanized steel. VKP 125/125*2 model are available with two inlets.

MOTOR

The external rotor motor on ball bearings and the backward curved, balanced impeller is suitable for high pressure application, prevent vibration and assure quiet operation.

SUITABLE FOR:

General purpose ventilation and dryer exhaust application.

DIMENSIONS

Model	Measurements [in.]					
	Ø D	Ø D1	A	L	B	H
VKP 125/125*2	5"	5"	19 19/64"	16 3/16"	12 3/16"	7 1/2"

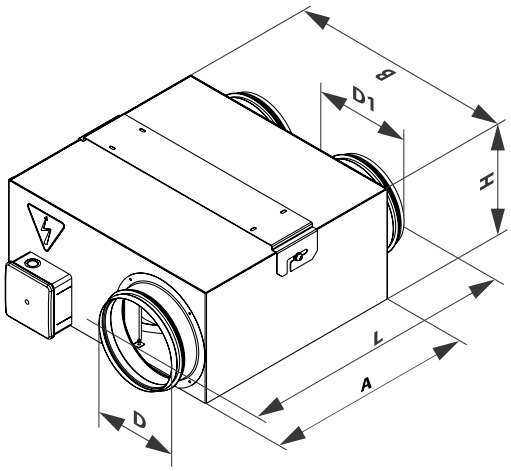

Tel: 888-640-0925
Fax: 513-583-5786

Sales@Vents-us.com
Vents-US.com
400 Murray Rd,
Cincinnati, OH 45217

RECOGNIZED COMPONENT
Intertek

HARDI

2025-02

PERFORMANCE

Model	Duct dia	Watts*	Amps*	CFM vs. Static Pressure (Ps) in WG											Max. Ps	Volts / Hz
				0"	0.1"	0.2"	0.3"	0.4"	0.5"	0.6"	0.7"	0.8"	0.9"	1"		
VKP 125/125"2	5" / 5"	74	0.61	244	234	223	213	204	194	183	170	160	150	140	1.9	120 / 60

* Indicated at 0.2 in.W.G.

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:

Tel: 888-640-0925
Fax: 513-583-5786

Sales@Vents-us.com
Vents-US.com
400 Murray Rd,
Cincinnati, OH 45217

RECOGNIZED COMPONENT
Intertek

HARDI